




d-flexx



Tender Text

FOXTROT Machine Guard

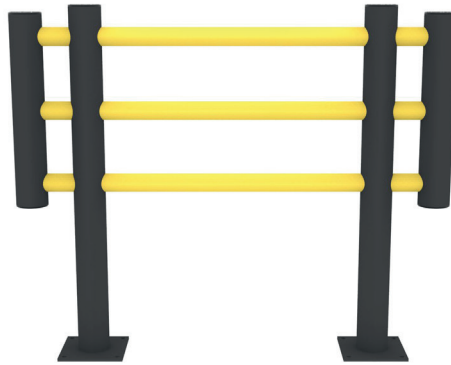

**Tested Impact Energy
according to PAS13**

17.000 Joule

At 22.5° Impact, 3.6 km/h
(2,24 mph) and 3.150 kg (6945 lbs)
on a C20/25 concrete floor and
force to bolt at 13 kN..

Maschine protection to separate working areas and routes from each other. Barriers must be produced in nontoxic polymer (PE) post in Ø110mm with integrated buffer pipe technology and barrier rails in Ø63mm. The mounting foot in 12µm powder coated steel. For safety reasons the primary colour must be Yellow RAL1018. Chemical resistance must be High according to ISO/TR 10358. The traffic barrier must be operational within the temperature range of -40° to +50° Celsius. The impact absorption at 90° must handle 2.500 Joules with a force to bolt at 21 kN in C20/25 non-cracked industrial grade concrete floor. Barriers must be delivered pre-assembled to reduce installation time limited to drill 8 holes. The barrier must have a minimum warranty of 5 years.