




d-flexx



Tender Text

OSCAR Slide Gate

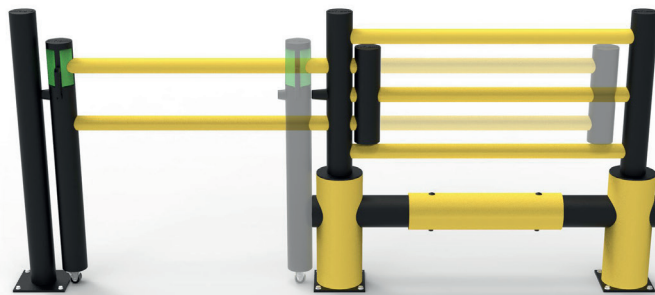

Compatible with

DELTA and ECHO

Slide gate integrates with d-flexx ECHO and DELTA. Gate must be produced in nontoxic highdensity polymer beams in Ø63mm and post with door handle in Ø110mm. For safety reasons the primary colour must be Yellow RAL1018. Stickers allow the passage to be labelled. Chemical resistance must be High according to ISO/TR 10358. The slide gate must be operational within the temperature range of -40° to +50° Celsius. Gate must be delivered pre-assembled to reduce installation time limited to 1 locking pin. The barrier must have a minimum warranty of 5 years.